

Peli protector cases – Protector cases – 1450 case



1450 Case

Interior dimensions:


37.1 x 25.8 x 15.2 cm
(14.62" x 10.18" x 6.00")

- Watertight, crushproof, and dust proof
- Easy-open, double-step latches
- Open cell core with solid wall design – strong, light weight
- O-ring seal
- Automatic Pressure Equalization Valve
- Comfortable, rubber over-moulded handle
- Stainless steel hardware and padlock protectors
- Pick 'N' Pluck™ with convoluted lid foam
- Personalised nameplate service available
- Unconditionally Guaranteed



Configurations

Cat. #	Description
1450	1450 Case (with foam)
1450NF	1450 Case (no foam)
1454	1450 Case with Padded Dividers

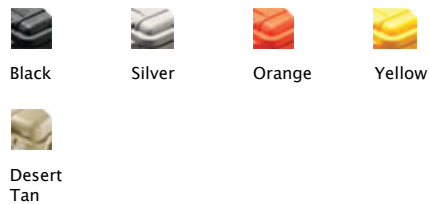

1450 Case Specifications

Exterior Dimensions (L x W x D) 40.6 x 33 x 17.4 cm (16.00" x 13.00" x 6.87")	Interior Dimensions (L x W x D) 37.1 x 25.8 x 15.2 cm (14.62" x 10.18" x 6.00")	
Lid Depth 4.4 cm (1.75")	Bottom Depth 10.8 cm (4.25")	Total Depth 15.2 cm (6.00")
Weight w/Foam 2.9 kg. (6.39 lbs)	Weight w/o Foam 2.5kg (5.51 lbs.)	Buoyancy Max. 13.61 kg (30 lbs.)
Range Temperature -23 / 99° C (-10 / 210° F)		

Personalized Nameplate Available

1450 Case Certificates

• IP67(1 meter submersion for 30 minutes) • MIL C-4150J • Def Stan 81-41/STANAG 4280

1450 Case Accessories

Cat. #	Description
1450PF	Special Application Panel Frame
1451	3 pc. Replacement Foam Set
1455	Padded Divider Set Only
1500IP	Instapak Quick® RT